INSTRUMENT APPROACH CHART

AERODROME ELEV 101 ft
HEIGHTS RELATED TO THR RWY 07 ELEV 68 ft

| | |
|---|---|
| ATIS | 127.600 |
| APP | 129.200 |
| TWR | 118.000 |

# EL SALVADOR / EL SALVADOR INTL

SAN OSCAR ARNULFO ROMERO Y GALDAMEZ

## ILS or LOC Z RWY 07

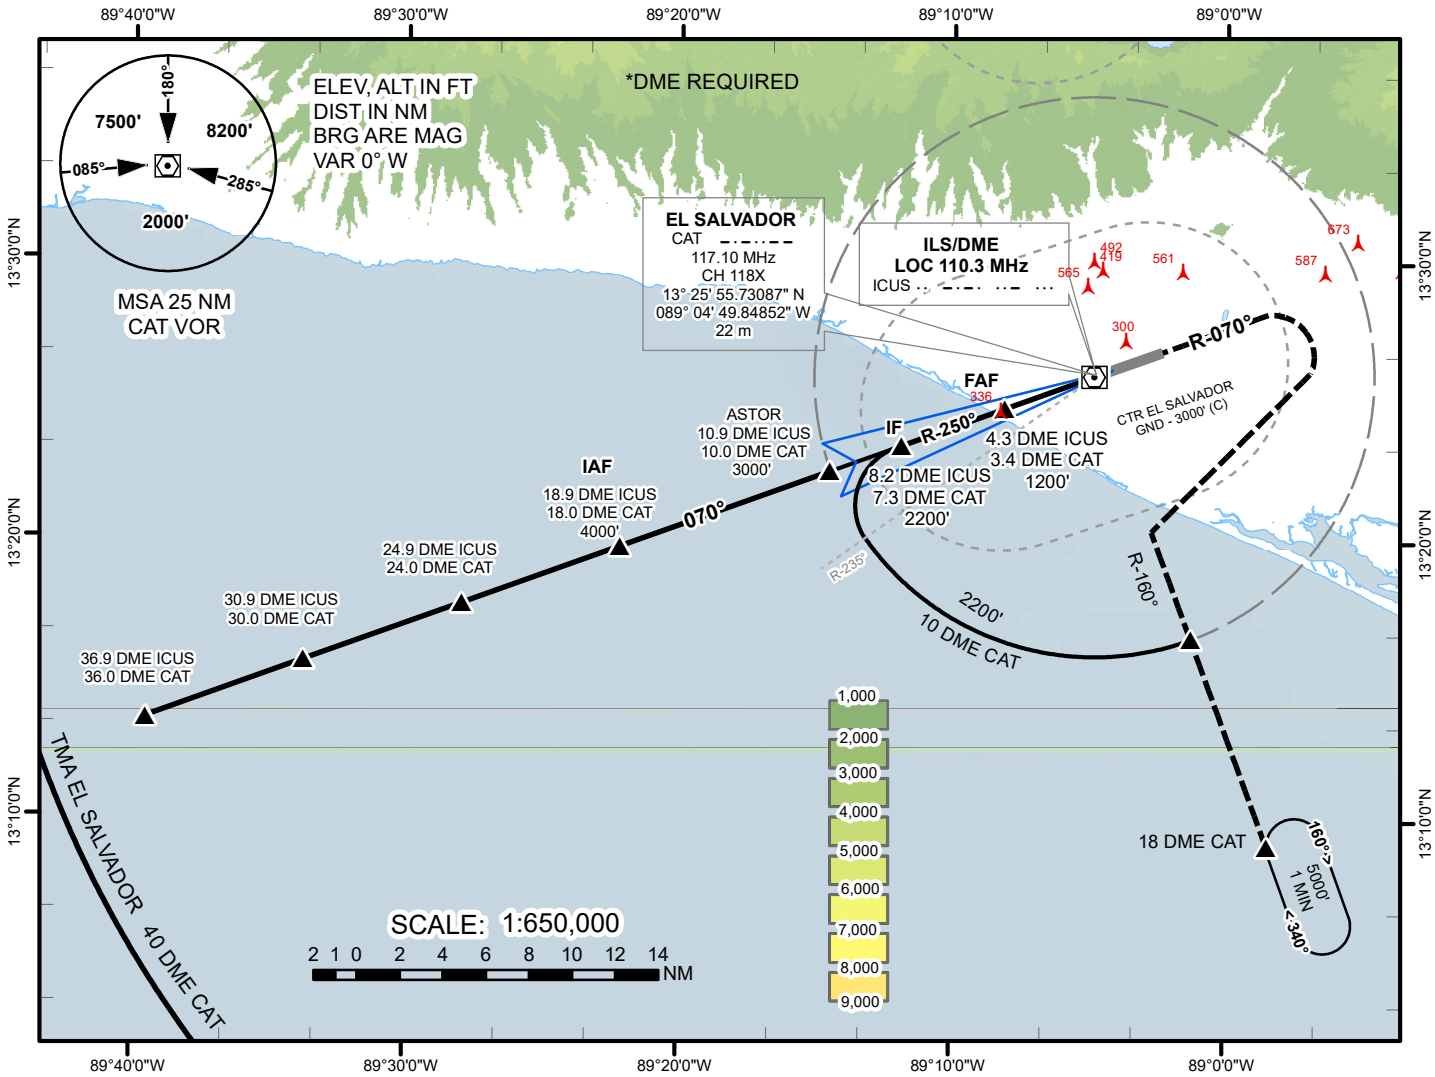


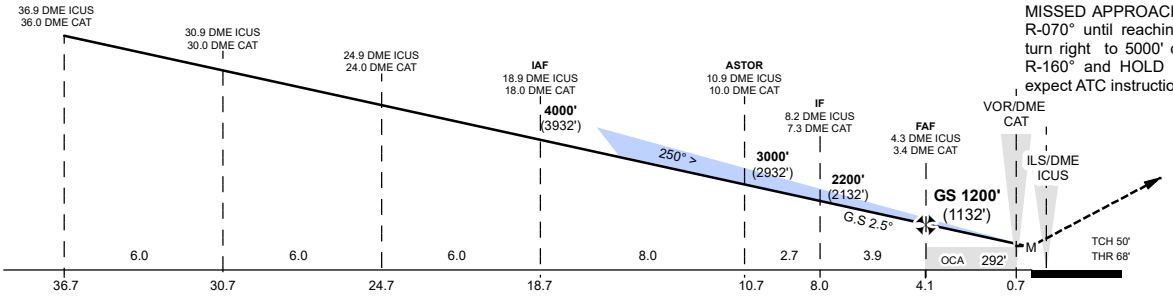


MISSED APPROACH : Climb on CAT VOR R-070° until reaching 1200' then climbing turn right to 5000' outbound via CAT VOR R-160° and HOLD at 18.0 DME CAT or expect ATC instructions.

| Ground Speed | kt | 70 | 90 | 100 | 120 | 140 | 165 |
|---|---|---|---|---|---|---|---|
| FAF to MAPt : 4.1 NM | min : sec | 3:31 | 2:44 | 2:28 | 2:03 | 1:45 | 1:29 |
| Rate of Descent 4.3% | ft / min | 310 | 398 | 442 | 531 | 619 | 730 |

| Distance THR | 8 nm | 7 nm | 6 nm | 5 nm | 4 nm | 3 nm | 2 nm | 1 nm |
|---|---|---|---|---|---|---|---|---|
| Altitude | 2240´ | 1974´ | 1709´ | 1444´ | 1178´ | 913´ | 648´ | 383´ |

CIRCLE TO LAND ONLY ON THE RIGHT

| STRAIGHT IN APPROACH | | | LOC (GS OUT) | |
|---|---|---|---|---|
| DA (H) **300´** (222´) | | | DA (H) **362´** (284´) | |
| CAT | FULL Ceiling - Visibility | ALS OUT Ceiling - Visibility | Ceiling- Visibility | ALS OUT Ceiling - Visibility |
| A | 300´ - 800m | 300´ - 1400m | 300´ - 800m | 300´ - 1600m |
| B | | | | |
| C | | | | |
| D | | | 300´ - 1200m | |

| MAX | MDA (H) | CEILING – VISIBILITY |
|---|---|---|
| 90 | 570' (469') | 500´ - 2400m |
| 120 | | |
| 140 | 670' (569') | 600´ - 3600m |
| 165 | | |